



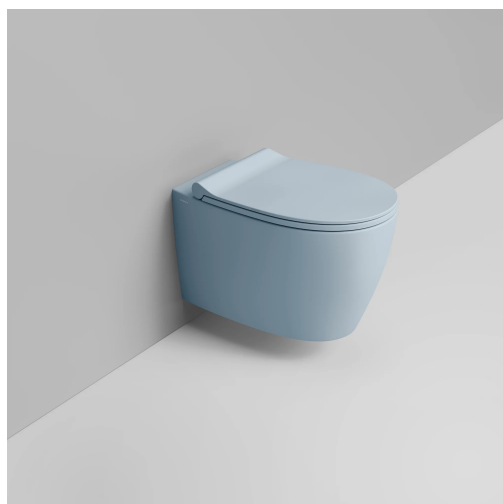


Wall hung with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the rimless system and the specially designed internal surface. Installation requires a dedicated wall mounted support brackets. To be completed with seat.

TECHNICAL DATA

Width	360 (mm)	Fixings included
Depth	540 (mm)	Hidden fixation set
Height	305 (mm)	bottom drive
Weight	24.5 (kg)	4,5-3 L flush
Exhaust type	horizontal outlet	Rimless System

FINISHES

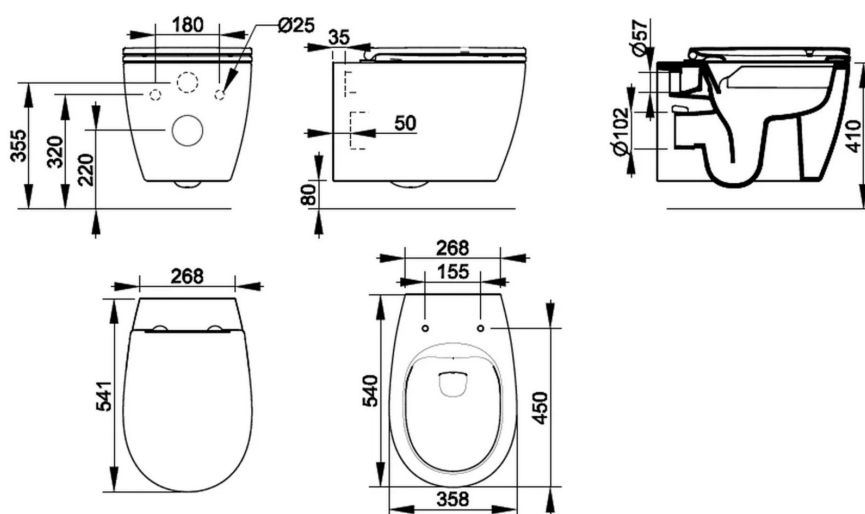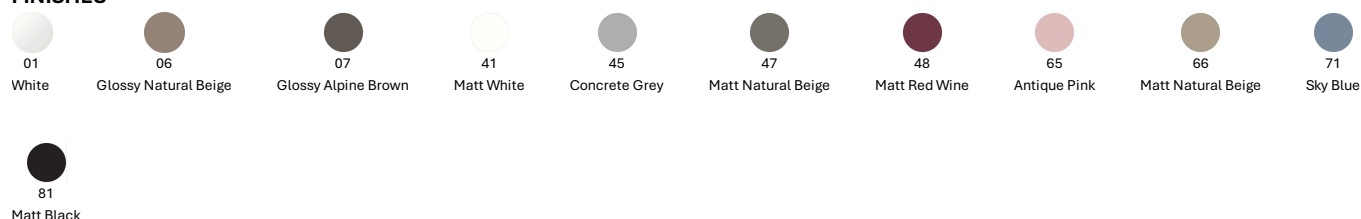

COMPLEMENTS



S423371

soft closing seat and cover, in thermosetting material, with metal hinges and quick-release system.



ACCESSORIES



F953199

fixing set for hidden wall hung installation.

(included)



F953099

chair brackets for wall mounted wc/bidet.

(required)



VS121CR

hinges for demy normal closing seat and cover.



VS123CR

hinges for demy soft closing seat and cover.



VS12701

buffers kit for demy/niva seat and cover.



F956399

mounting frame for wall-mounted wc equipped with dolomite 6e cistern (4,5/6lt). according to the specific kit supplied, is suitable for load-bearing installations, pre-existing loadbearing installations, lightweight walls and plasterboard. self-supporting painted tubular steel frame. overall dimensions for 100 mm raw walls.



F953999

soundproofing protection set for wall hung sanitaryware.



F956199

mounting frame for wall-mounted wc equipped with dolomite 6e cistern (4,5/6lt) for load-bearing installations. not suitable for lightweight walls or plasterboard. anti-corrosion galvanised frame 2 mm metal thickness. structure certified according to standards uni en 977/1-997-89500/2.



F956299

mounting frame for wall-hung wc equipped with dolomite 6e cistern (4,5/6lt). according to the specific kit supplied, is suitable for load-bearing installations, pre-existing load-bearing installations, lightweight walls and plasterboard. structure certified according to standards uni en 977/1-997-89500/2.



A412199

fixing kit for plasterboard walls for f956299