




BTW with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the vortex system and the specially designed internal surface. To be completed with seat and, if required, a technical bend for floor outlet.

TECHNICAL DATA

Width	550 (mm)	 Fixings included
Depth	360 (mm)	 Vortex
Height	480 (mm)	 Shifted bowl
Exhaust type	universal outlet	 4,5-3 L flush
Installation type	back to wall	 Hidden fixation set

FINISHES

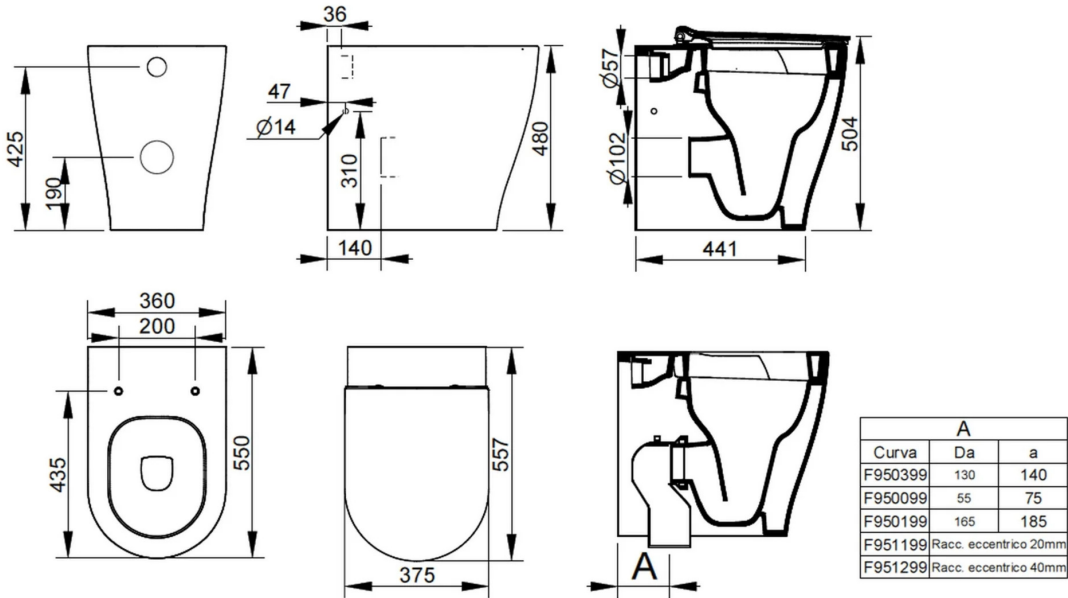

COMPLEMENTS



S473341
soft closing seat and cover, in
thermosetting material, with
metal hinges and quick-release
system.



ACCESSORIES



F953299

fixing set for hidden btw installation.

(included)



F950099

plastic outlet bend 90° - for installation, please refer to technical sheet.



F950199

plastic outlet bend 90°, to be installed only on shifted btw bowl - for installation, please refer to technical sheet.



F950399

plastic 's' outlet bend 90° - for installation, please refer to technical sheet.



F951199

eccentric adapter for outlet +/- 20mm.



F951299

eccentric adapter for outlet +/- 40mm.



VS52701

buffers kit for mia/mirto/gemma2 seat and cover



VS373CR

hinges with horizon fixation set for mrto round soft closing seat and cover.



F956099

dolomite concealed cistern for floor-standing wc. pipe with rosette 40mm. ideal for integration with state-of-the-art sanitary ware that is also certified for reduced flushing. monoblock container with a nominal thickness of 85mm. norma-plus float valve, acoustic class 1, lga-tuv approved adjustable between 6 and 4.5lt.