


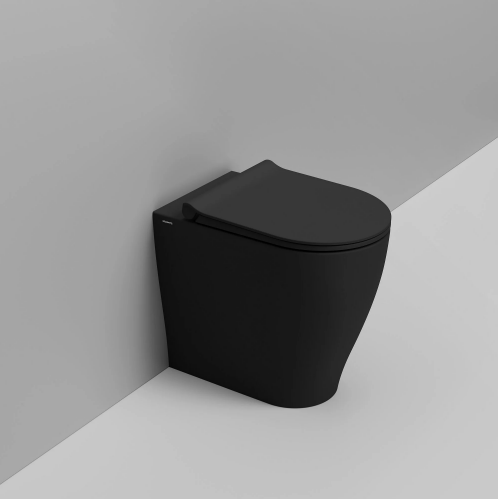


BTW with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the vortex system and the specially designed internal surface. To be completed with seat and, if required, a technical bend for floor outlet.

TECHNICAL DATA

Width	550 (mm)	 Fixings included
Depth	360 (mm)	 Vortex
Height	480 (mm)	 Shifted bowl
Exhaust type	universal outlet	 4,5-3 L flush
Installation type	back to wall	 Hidden fixation set

FINISHES

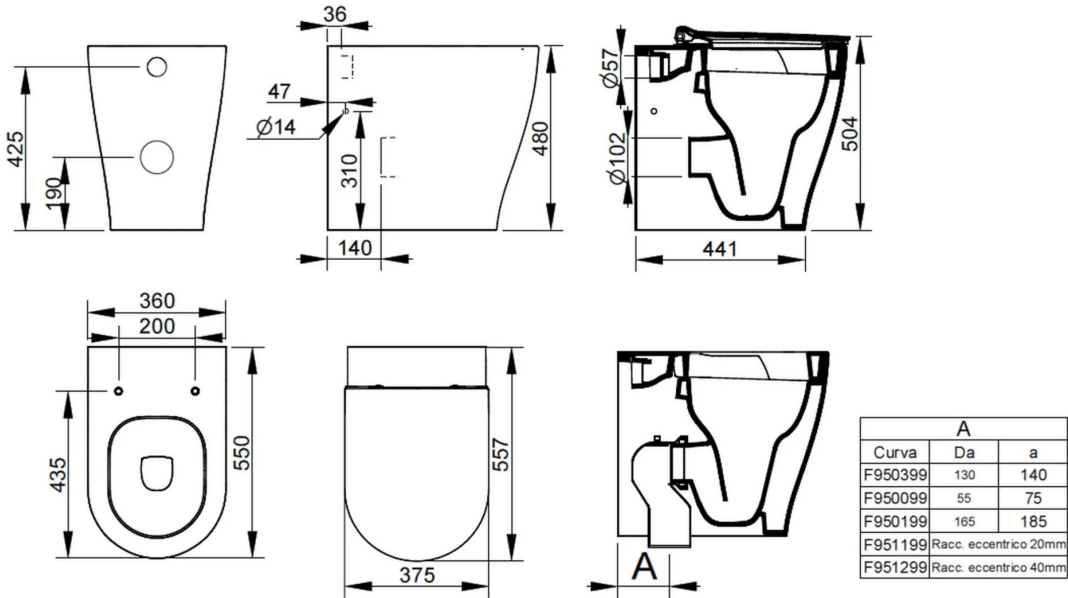

COMPLEMENTS



S473381
soft closing seat and cover, in
thermosetting material, with
metal hinges and quick-release
system.



ACCESSORIES



F953299
fixing set for hidden btw
installation.
(included)



F950099
plastic outlet bend 90° - for
installation, please refer to
technical sheet.



F950199
plastic outlet bend 90°, to be
installed only on shifted btw
bowl - for installation, please
refer to technical sheet.



F950399
plastic 's' outlet bend 90° - for
installation, please refer to
technical sheet.



F951199
eccentric adapter for outlet +/-
20mm.



F951299
eccentric adapter for outlet +/-
40mm.



VS52701
buffers kit for
mia/mirto/gemma2 seat and
cover



VS373CR
hinges with horizon fixation set
for mrto round soft closing seat
and cover.



F956099
dolomite concealed cistern for
floor-standing wc. pipe with
rosette 40mm. ideal for
integration with state-of-the-art
sanitary ware that is also
certified for reduced flushing.
monoblock container with a
nominal thickness of 85mm.
norma-plus float valve,
acoustic class 1, lga-tuv
approved adjustable between 6
and 4.5lt.