


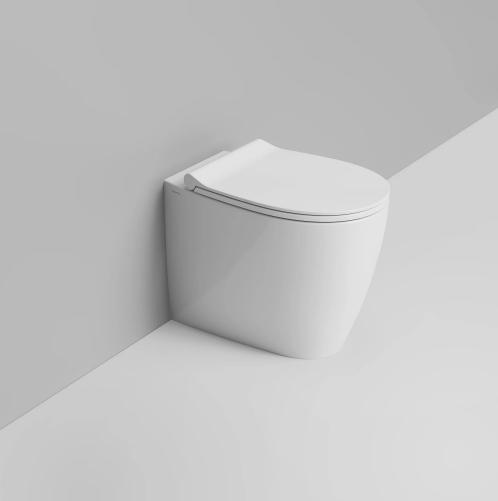

BTW with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the rimless system and the specially designed internal surface. To be completed with seat and, if required, a technical bend for floor outlet.


TECHNICAL DATA

Width	360 (mm)
Depth	540 (mm)
Height	410 (mm)
Weight	27.7 (kg)
Exhaust type	universal outlet
Installation type	back to wall

-  Fixings included
-  Hidden fixation set
-  Shifted bowl
-  4,5-3 L flush
-  Rimless System

FINISHES

-  01
White
-  06
Glossy Natural Beige
-  07
Glossy Alpine Brown
-  41
Matt White
-  45
Concrete Grey
-  47
Matt Natural Beige
-  48
Matt Red Wine
-  65
Antique Pink
-  66
Matt Natural Beige
-  71
Sky Blue
-  81
Matt Black

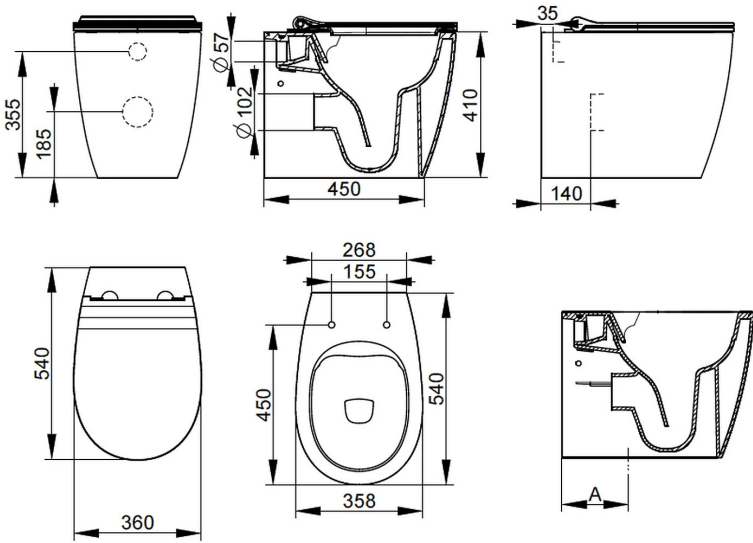

A		
Curva	Da	a
F950099	55	95
F950399	130	140
F950199	160	190 Max
F951199	Racc.eccentrico 20mm	
F951299	Racc.eccentrico 40mm	

COMPLEMENTS



S423201
normal closing seat and cover,
in thermosetting
material, with metal hinges.



S423301
soft closing seat and cover, in
thermosetting material, with
metal hinges and quick-release
system.



ACCESSORIES



F953299

fixing set for hidden btw installation.
(included)



F950099

plastic outlet bend 90° - for installation, please refer to technical sheet.



F950199

plastic outlet bend 90°, to be installed only on shifted btw bowl - for installation, please refer to technical sheet.



F950399

plastic 's' outlet bend 90° - for installation, please refer to technical sheet.



F951199

eccentric adapter for outlet +/- 20mm.



F951299

eccentric adapter for outlet +/- 40mm.



F952199

eccentric adapter for wc water inlet 10 mm.



VS121CR

hinges for demy normal closing seat and cover.



VS123CR

hinges for demy soft closing seat and cover.



VS12701

buffers kit for demy/niva seat and cover.



F956099

dolomite concealed cistern for floor-standing wc. pipe with rosette 40mm. ideal for integration with state-of-the-art sanitary ware that is also certified for reduced flushing. monoblock container with a nominal thickness of 85mm. norma-plus float valve, acoustic class 1, lga-tuv approved adjustable between 6 and 4.5lt.